



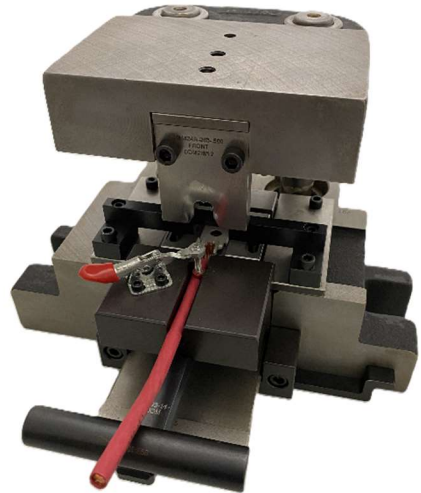

Heavy Duty Crimping Applicators

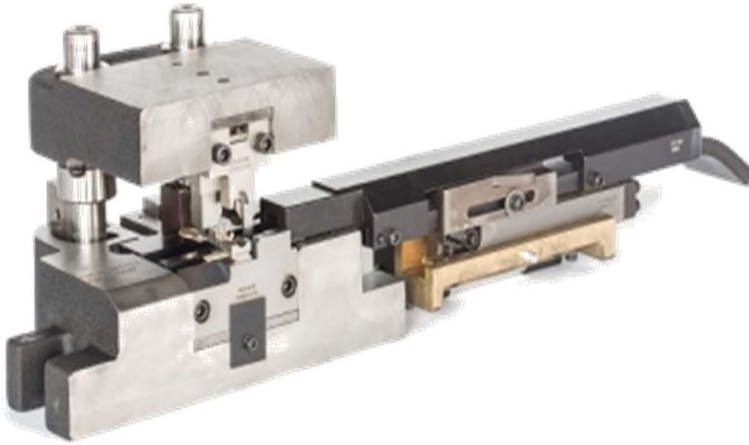

Right to Left Feed (shown left above) and Shuttle (shown right above)
Left to Right Feed and End Feed not shown

Technical Information

Description	Side Feed	End Feed	Shuttle
Feed Direction	Left to Right Right to Left	Back to Front	Loose Piece
Wire Range*	1000kcmil (600mm ²)	1000kcmil (600mm ²)	1000kcmil (600mm ²)
T-Slot Adapter	Available	Available	Available
Bolster Plate	Press Specific	Press Specific	Press Specific
Pressure Pad	Available	N/A	N/A
Wire Depressor	Available	N/A	Manual Clamp
Limit Switch	N/A	N/A	Yes
Size Width	25.5" (648mm)	11.0" (280mm)	11.0" (280mm)
Size Height	7.5" (191mm)	7.5" (191mm)	7.5" (191mm)
Size Depth	7.0" (178mm)	22.0" (559mm)	Closed: 14.5" (369mm) Open: 16.5" (420mm)
Stroke	2.00" (50.8mm)	2.00" (50.8mm)	2.00" (50.8mm)

NOTE: * Size may vary based upon wire configuration, terminal geometry and other factors