




Hi-Speed Crimping Applicators

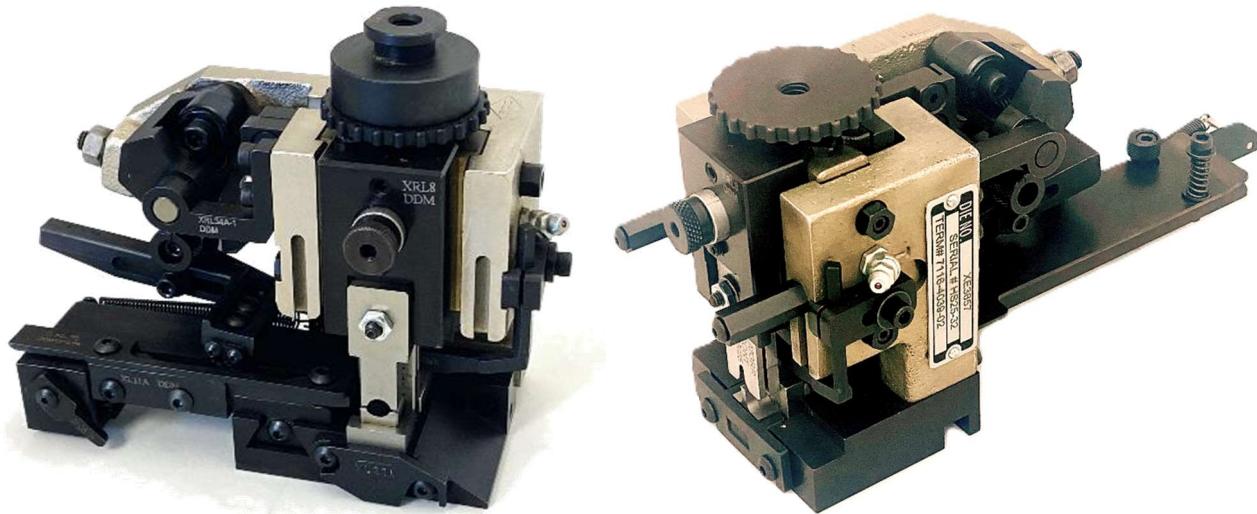

Left to Right Feed XL (shown left above) and End Feed XE (shown right above)

Right to Left Feed XR and Loose Piece Shuttle XS not shown

Technical Information

Description	XL and XR	XE	XS
Feed Direction	Left to Right Right to Left	Back to Front	Loose Piece
Wire Range*	28 AWG – 10 AWG (0.08mm ² – 5.26mm ²)	28 AWG – 10 AWG (0.08mm ² – 5.26mm ²)	28 AWG – 10 AWG (0.08mm ² – 5.26mm ²)
T-Slot Adapter	Yes	Yes	Yes
Bolster Plate	Available for most presses	Available for most presses	Available for most presses
Pressure Pad	Available	N/A	N/A
Wire Depressor	Available for < 20 AWG (0.5mm ²)	N/A	Manual Clamp
Limit Switch	N/A	N/A	Yes
Size Width	7.25" (185mm)	4.25" (108mm)	4.25" (108mm)
Size Depth	4" (102mm)	10.0" (254mm)	Closed: 11.0" (280mm) Open: 12.25" (318mm)
Stroke	1.57" (40mm)	1.57" (40mm)	1.57" (40mm)

NOTE: * Size may vary based upon wire configuration, terminal geometry and other factors



Features

