




Hydrofeed Crimping Applicators

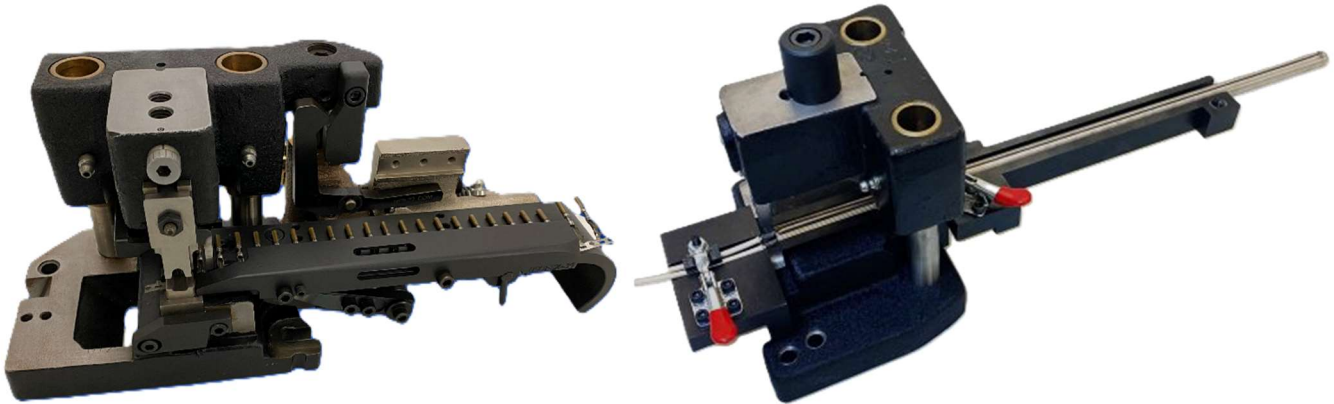

Right to Left Feed (shown left above) and Loose Piece (shown right above)
Left to Right Feed, End Feed and Shuttle not shown

Technical Information

Description	Side Feed	End Feed	Loose Piece and Shuttle
Feed Direction	Left to Right Right to Left	Back to Front	Loose Piece
Wire Range*	12 AWG – 2/0 (3.3mm ² – 67.0mm ²)	12 AWG – 2/0 (3.3mm ² – 67.0mm ²)	12 AWG – 2/0 (3.3mm ² – 67.0mm ²)
Multi-Crimp	Up to 4x pending spacing	N/A	N/A
T-Slot Adapter	Yes	Yes	Yes
Bolster Plate	Press Specific	Press Specific	Press Specific
Pressure Pad	Available	N/A	Available
Wire Depressor	Available	N/A	Manual Clamp
Limit Switch	N/A	N/A	Yes (Shuttle only)
Size Width	12.25" (312mm)	6.0" (153mm)	6.0" (153mm)
Size Height	4.625" (118mm)	4.625" (118mm)	4.625" (118mm)
Size Depth	4.75" (121mm)	11.0" (280mm)	Varies with Terminal
Stroke	2.00" (50.8mm)	2.00" (50.8mm)	2.00" (50.8mm)

NOTE: * Size may vary based upon wire configuration, terminal geometry and other factors